

Mod.  
**CB**



$$Q = 90 \div 600 \text{m}^3/\text{h}$$



$$Q = 0.025 \div 0.17 \text{m}^3/\text{s}$$

$$p_t = 7 \div 60 \text{mmH}_2\text{O}$$

$$p_t = 70 \div 600 \text{Pa}$$

**CB**

Ulteriori informazioni e quote:  
 ■ Ulérieures informations et cotes:  
 ■ Further information and sizes:  
 ■ Weitere Infos und Größen:  
 ■ Más informaciones y medidas:

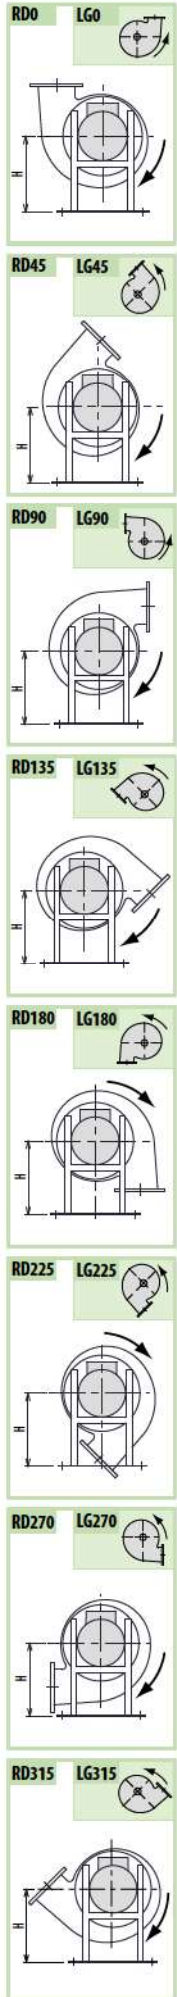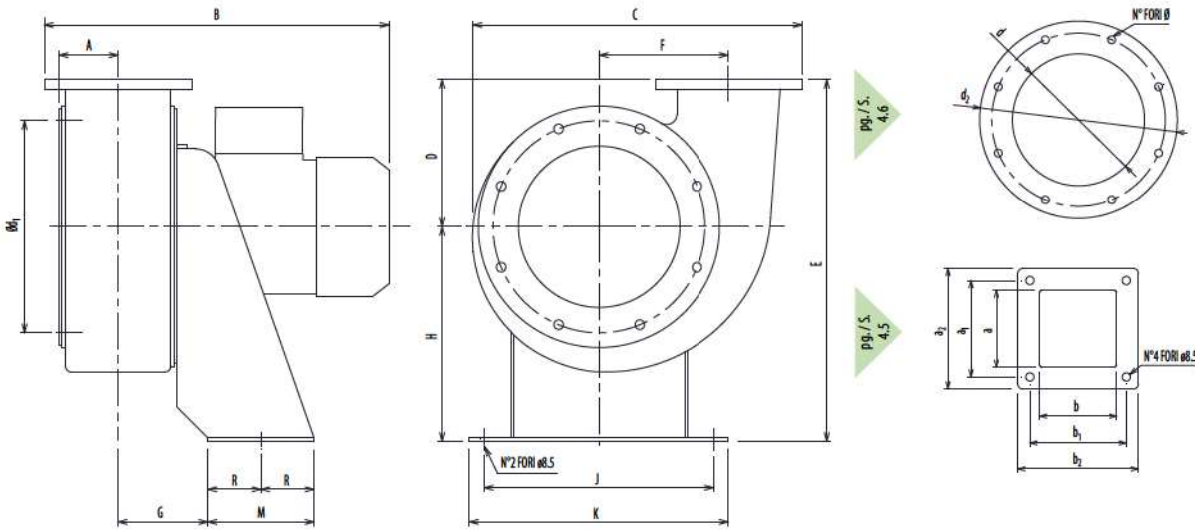

TIPO - Type		PESO Weight Kg	PD <sup>2</sup> Kgf x m <sup>2</sup>	A	B	C	D	E	F	G	H	J	K	M	R	a	a <sub>1</sub>	a <sub>2</sub>	b	b <sub>1</sub>	b <sub>2</sub>	d	d <sub>1</sub>	d <sub>2</sub>	Ø	N
VENTILATORE Fan	MOTORE Motor			42	206	87	216	65	70	129	130	160	70	35	68	88	108	68	88	108	68	88	102	133	150	8
<b>CB11</b>	56 M2	6	0.01	250																						
	56 M4	6	0.01	250																						
<b>CB16</b>	63 M2	9	0.02	280	280	125	307	110	76	182	195	220	90	45	80	100	125	80	100	125	150	180	200	8	8	
	63 M4	9	0.02	280	280	125	307	110	76	182	195	220	90	45	80	100	125	80	100	125	150	180	200	8	8	

**CARATTERISTICHE IN MANDATA**

■ CARACTERISTIQUES EN SOUFFLAGE ■ DELIVERY CHARACTERISTICS ■ LEISTUNGSMERKMALE ■ CARACTERISTICAS EN EMPUJE

TIPO - Type		P inst. Install. P [kW]	n	Tolleranza sulla portata ±5% • Tolérance sur le débit ±5% • Load tolerance ±5% • Durchsatztoleranz ±5% • Tolerancia respecto caudal ±5%																					
VENTILATORE Fan	MOTORE Motor			Q [m <sup>3</sup> /h]																					
				pt[mmH <sub>2</sub> O]																					
				90	100	150	200	250	300	350	400	500	600												
<b>CB11/4</b>	56	0,09	1350	7	7	6																			
<b>CB11/2</b>	56	0,09	2800			24	24	22	21																
<b>CB16/4</b>	63	0,12	1350				17	17	16	14															
<b>CB16/2</b>	63	0,18	2820							63	64	64	60												